

## GZF80

For RM84, RM85,
RM85 inrush,
RM85 105 °C sensitive,
RM87L, RM87L sensitive,
RM87P, RM87P sensitive,
RMP84, RMP85


Screw terminals
Max. tightening moment
for the terminal: 0,5 Nm
35 mm rail mount
acc. to EN 60715
or on panel mounting
67,2 x 15,5 x 36,5 mm
Two poles, 5 mm pinout
10 A, 250 V AC

### Connection diagrams ❸

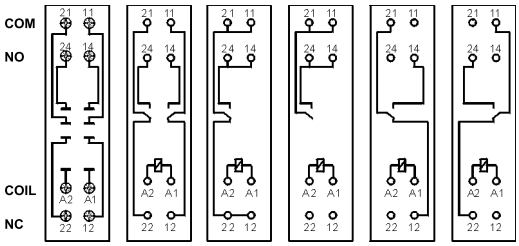

### Dimensions

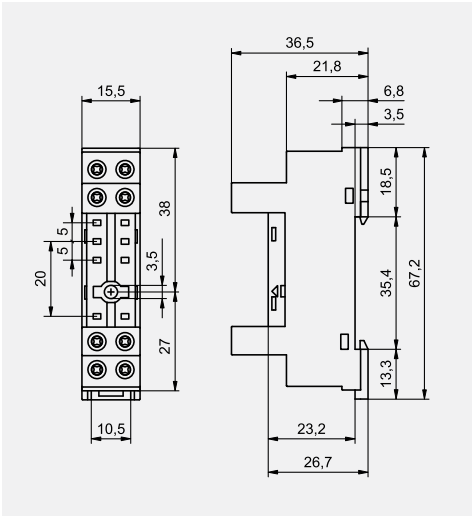


### Accessories



GZM80-0041 (RM84/85/87)
GZ80-1001 (RMP84/85)


## GZP80

For RM84, RM85,
RM85 inrush,
RM85 105 °C sensitive,
RM87L, RM87L sensitive,
RM87P, RM87P sensitive,
RMP84, RMP85

Push-in terminals
( ammability class V-0)
Max. cross section of the cables:
2 x 1,5 mm² (solid, stranded wire
without ferrule or stranded wire
with non-insulated ferrule)
2 x 1 mm² (solid or stranded wire
with insulated ferrule)
Stripping length: 8...10 mm


35 mm rail mount
acc. to EN 60715
or on panel mounting
97 x 15,9 x 45,9(75,8) mm ❷
5 mm pinout
One pole
12 A, 300 V AC
Two poles
8 A, 300 V AC


### Connection diagrams ❸

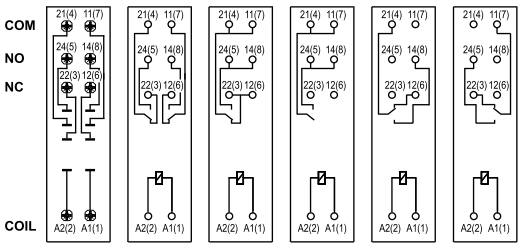




### Dimensions

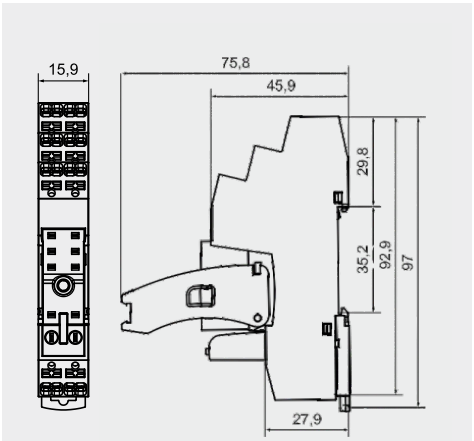

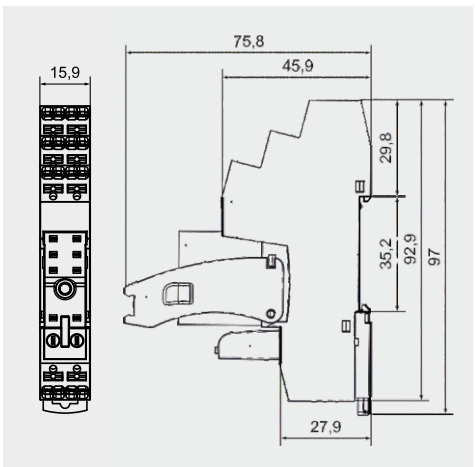


Module type M...



ZGZP80-8



MP15



ZGZP80-2



ZGZP-2



GZP80-0441 (RM84/85/87) (RMP84/85)



GZP80-0442 (RM84/85/87) (RMP84/85)




GZT80-0040 (RM84/85/87)




GZM80-0041 (RM84/85/87)



GZ80-1001 (RMP84/85)



The drawings present inserting wire into the Push-in terminal and removing wire using the button releasing a clamp (assembly without tools).




### Accessories ❶


### Wire connection

28.07.2026


## PW80

For RM84, RM85, RM85 inrush,
RM85 105 °C sensitive,
RM87L, RM87L sensitive,
RM87P, RM87P sensitive,
RM83

For PCB
34,6 x 12,9 x 6,6 mm
Two poles, 5 mm pinout
12 A, 250 V AC



### Pinout




### Accessories




MH16-2
(RM84/85/87)



MH25-2
(RM83)

### Dimensions




❶ Mounting and sub-assemblies of accessories in the socket; Signalling / protecting modules type M... - see www.relpol.com.pl ❷ In the bracket the height of socket with retainer / retractor clip is shown. ❸ For RM85..., RMP85: loads above 12 A (GZT80, GZM80, GZP80) or 10 A (GZS80, GZF80) require bridging pairs of terminals: 11 with 21, 12 with 22, 14 with 24 - see www.relpol.com.pl